

DIAPHRAGM SEALS MODEL DM-35 & DM-45

Mini Seal All Welded Design

(Model DM-35 for 1 1/2" to 4" dials and Model DM-45 for up to 4 1/2" dials.)


Diaphragm seals are used to prevent the process fluid from entering the instrument.

FEATURES:

- The Diaphragm on the DM-35 and DM-45 is welded to the upper and lower housing providing 1 piece design.
- All 316 stainless steel construction
- 1/4" NPT or 1/2" NPT gauge connection
- 1/4" NPT or 1/2" NPT process connection
- Available with 1/4" NPT flushing connection. (DM-35F & DM-45F)
- Pressure rated to 1000 PSI



◀ **MODEL DM-45**

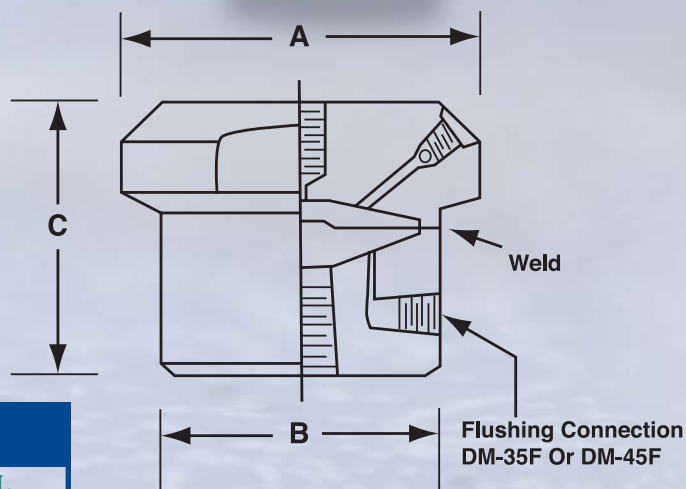

HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING: FOR GAUGES WITH DIALS 1 1/2" TO 4"

MODEL #	GAUGE CONNECTION	PROCESS CONNECTION	FILL FLUID
DM-35	4 = 1/4" NPT	4 = 1/4" NPT	G = GLYCERIN
DM-35F	2 = 1/2" NPT	2 = 1/2" NPT	O = INST. OIL
			S = SILICONE

HOW TO ORDER - PLEASE SPECIFY THE FOLLOWING: FOR GAUGES WITH DIALS 4 1/2"

MODEL #	GAUGE CONNECTION	PROCESS CONNECTION	FILL FLUID
DM-45	4 = 1/4" NPT	4 = 1/4" NPT	G = GLYCERIN
DM-45F	2 = 1/2" NPT	2 = 1/2" NPT	O = INST. OIL
			S = SILICONE

MODEL NO.	DIMENSIONS		
	A	B	C
DM-35	1.75"	1.50"	1.50"
DM-35F	1.75"	1.50"	1.75"
DM-45	2.50"	1.88"	1.50"
DM-45F	2.50"	1.88"	1.75"